



Keystone Compliance, LLC
131 Columbus Inner Belt
New Castle, PA 16101

Phone: 724-657-9940
Fax: 724-657-9920

Kan-Seal

1708-152EA





EMI TEST REPORT 1708-152EA REV. A

TEST STANDARDS: MIL-STD-188-125-1

For

KAN-SEAL
1905 HIGHWAY 75
BURLINGTON, KS 66839

On

1PH FILTER

MODEL NUMBER: SP-120-240-W / SP-120-240-RL / SP-120-240-TB / SP-240-EUW / SP-240-EUTB / SP-240-EURL ; PART NUMBER: NONE ; SERIAL NUMBER: NONE

PERFORMED BY: **KEYSTONE COMPLIANCE, LLC.**
131 COLUMBUS INNER BELT
NEW CASTLE, PA 16101

Keystone Compliance, LLC. does hereby certify that all inspections and tests have been performed in accordance with the documents referenced herein with exceptions as noted in this report. The results in this report pertain to the specified equipment tested. This report shall not be reproduced, except in full, without the written authorization of Keystone Compliance, LLC.

Prepared By: ant hallowich Date: 11/16/2017
ANTONIETTA HALLOWICH, Technical Writer

Approved By: Anthony J. Masone Date: 11/16/2017
TONY MASONE JR., EMC Lab Manager

Approved By: Joey Sullivan Date: 11/16/2017
JOEY SULLIVAN, Quality Manager



EMI TEST REPORT FOR KAN-SEAL

| DOCUMENT HISTORY | | | | |
|-------------------------|-------------------|-------------------------------------|-------------------|--------------------|
| Revision | Issue Date | Description Of Modifications | Revised By | Approved By |
| N/C | 11/16/2017 | Initial release | N/A | T.M. |
| A | 11/16/2017 | Added Model Numbers | AH | TM |
| | | | | |
| | | | | |
| | | | | |
| | | | | |



EMI TEST REPORT FOR KAN-SEAL

| CLIENT INFORMATION | |
|--|---|
| Purchase Order Quote Number EUT Arrival Date | Signed Quote 1708-152EA 11/9/2017 -- Recieved in good condition |
| Company Name Address City, State Zip | Kan-Seal 1905 Highway 75 Burlington, KS 66839 |
| Contact Name Phone Email | Tim Carty 785-806-5523 TimothyCarty@gmail.com |

| TEST FACILITY INFORMATION | |
|---|--|
| Test Laboratory Address City, State, Zip Code Phone Fax Web Site | Keystone Compliance, LLC. 131 Columbus Inner Belt New Castle, PA 16101 (724) 657-9940 (724) 657-9920 www.keystonecompliance.com |
| Contact Name Title E-Mail Address | Tony Masone Jr. EMC Lab Manager tonyjr@keystonecompliance.com |

| TEST PROGRAM INFORMATION | |
|--------------------------|--|
| Test Personnel | Mike Gennaro -- EMC Test Technician |
| Test Title & Test Dates | Pulsed Current Injection -- November 13, 2017 to November 14, 2017 |



EMI TEST REPORT FOR KAN-SEAL

TABLE OF CONTENTS

INTRODUCTION..... 6

ACRONYMS AND ABBREVIATIONS..... 6

CONFIGURATION 7

SUMMARY OF TESTS PERFORMED & RESULTS 8

SECTION 1 – TEST CONDITIONS AND EQUIPMENT 9

1.1 Instrumentation and Equipment 9

1.2 Tolerances..... 9

SECTION 2 – REFERENCES 10

2.1 Applicable Specifications 10

SECTION 3 –TEST EQUIPMENT, TEST DATA, & TEST PHOTOGRAPHS 11

3.1 PULSED CURRENT INJECTION TEST..... 11

3.1.1 Pulsed Current Injection Test Equipment Log 12

3.1.2 Pulsed Current Injection Test Data 13

3.1.3 Pulsed Current Injection Test Photographs 38

SECTION 4 – CONCLUSION 40

LIST OF TABLES

Table 1 Test Performed & Results 8

Table 2 Test Performed & Results 40

EMI TEST REPORT FOR KAN-SEAL

INTRODUCTION

This report documents the results of the EMC tests performed on the 1Ph Filter, Model Number: SP-120-240-W / SP-120-240-RL / SP-120-240-TB / SP-240-EUW / SP-240-EUTB / SP-240-EURL; Part Number: None; Serial Number: None, submitted by Kan-Seal

The EMC test programs described herein were performed in accordance with the applicable requirements of MIL-STD-188-125-1.

All test data is included in Section 3 of this document.

All tests performed at Keystone Compliance New Castle, PA EMC test facility. All tests were performed using the test set-ups of the relevant standard for tests performed in laboratory conditions.

ACRONYMS AND ABBREVIATIONS

| | |
|--|--|
| EMC – Electromagnetic Compatibility | EMI – Electromagnetic Interference |
| EUT – Equipment Under Test | M/N – Model Number |
| P/N – Part Number | S/N – Serial Number |
| Vac – Voltage Alternating Current | DC – Direct Current |
| AM – Amplitude Modulation | dB – Decibel |
| deg – Degree | H/V – Horizontal or Vertical Polarity |
| m – Meters | cm – Centimeter |
| V/m – Volts per meter | dBuV/m – Decibel microvolts per meter |
| kV – Kilovolt | Hz – Hertz |
| kHz – Kilohertz | MHz – Megahertz |
| GHz – Gigahertz | pF – Picofarad |
| Ω – Ohm | QP – Quasi-Peak |
| N/A – Not Applicable | |

EMI TEST REPORT FOR KAN-SEAL

CONFIGURATION

Testing performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations, and settings used to complete the evaluation. The actual test parameters specified in the test data; this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation indicated in the test data.

| EUT | | |
|--|-------------|-----------------|
| Description | | Manufacturer |
| 1Ph Filter | | Kan-Seal |
| Model Number | Part Number | Serial Number |
| SP-120-240-W / SP-120-240-RL / SP-120-240-TB / SP-240-EUW / SP-240-EUTB / SP-240-EURL | None | None |



EMI TEST REPORT FOR KAN-SEAL

SUMMARY OF TESTS PERFORMED & RESULTS

TABLE 1 TEST PERFORMED & RESULTS

| Report Paragraph | Test Description | Specification | Notes | Results |
|--------------------------|--------------------------|-------------------|--|-----------|
| MIL-STD-188-125-1 | | | | |
| 3.1 | Pulsed Current Injection | MIL-STD-188-125-1 | <p>Short Pulse (Powered): Common Mode 5000A/≥60Ω; ≤2×10⁻⁸ (Rise) x 5×10⁻⁷- 5.5×10⁻⁷</p> <p>Short Pulse (Un-powered): Wire to Ground 2500A/≥60Ω; ≤2×10⁻⁸ (Rise) x 5×10⁻⁷- 5.5×10⁻⁷</p> <p>Intermediate Pulse: Common Mode 250A/≥10Ω; ≤1.5×10⁻⁶ (Rise) x 3×10⁻³-5×10⁻³</p> <p>Intermediate Pulse: Wire to Ground 250A/≥10Ω; ≤1.5×10⁻⁶ (Rise) x 3×10⁻³-5×10⁻³</p> | Compliant |

EMI TEST REPORT FOR KAN-SEAL

SECTION 1 – TEST CONDITIONS AND EQUIPMENT**1.1 INSTRUMENTATION AND EQUIPMENT**

Measuring and test equipment, utilized in the performance of these tests, was calibrated in accordance with ANSI/NCSL Z540-3-2006, by Keystone Compliance, LLC or a commercial facility, utilizing reference standards (or interim standards) whose calibrations have been certified as being traceable to the National Institute of Standards & Technology (NIST). All reference standards utilized in the above calibration system are supported by certificates, reports, or data sheets attesting to the date, accuracy, and conditions under which the results furnished were obtained. All subordinate standards, measuring and test equipment are supported by like data, when such information is essential to achieve the accuracy control required by the procedure.

Keystone Compliance, LLC attests that the commercial sources providing calibration services on the above referenced equipment, other than the NIST Standards are in fact capable of performing the required services to the satisfaction of Keystone Compliance, LLC Quality Assurance. Certifications of all calibrations performed are retained on file in the Keystone Compliance, LLC Quality Assurance Department, and are available for inspection upon request by customer representatives.

The test equipment utilized during this test program is listed on individual Test Equipment Logs located in Section 3 of this document.

1.2 TOLERANCES

All test conditions were maintained within all applicable specified tolerances.

EMI TEST REPORT FOR KAN-SEAL

SECTION 2 – REFERENCES

2.1 APPLICABLE SPECIFICATIONS

| | |
|-------------------------------|---|
| Reference Specification Title | MIL-STD-188-125-1 High-Altitude Electromagnetic Pulse (HEMP) Protection For Ground-Based C41 Facilities Performing Critical, Time-Urgent Missions Part 1 Fixed Facilities |
| Calibration Information | ANSI/NCSL Z540-3-2006 Calibration Laboratories and Measuring Test Equipment - General Requirements |



EMI TEST REPORT FOR KAN-SEAL

SECTION 3 –TEST EQUIPMENT, TEST DATA, & TEST PHOTOGRAPHS

3.1 PULSED CURRENT INJECTION TEST

- a) The Pulsed Current Injection test requirements for the 1Ph Filter are specified in MIL-STD-188-125-1.
- b) The Pulsed Current Injection test equipment used to test the 1Ph Filter is located in Paragraph 3.1.1 of this document.
- c) All recorded test data for the Pulsed Current Injection test on the 1Ph Filter is located in Paragraph 3.1.2 of this document.
- d) The Pulsed Current Injection test photographs for the 1Ph Filter are located in Paragraph 3.1.3 of this document.



EMI TEST REPORT FOR KAN-SEAL

3.1.1 PULSED CURRENT INJECTION TEST EQUIPMENT LOG

| Equipment Log | | | |
|---------------------|---------------------------------|----------------|--|
| EUT: | 1Ph Filter | Job Number: | 1708-152EA |
| Customer: | Kan-Seal | Model Number: | SP-120-240-W / SP-120-240-RL / SP-120-240-TB / SP-240-EUW / SP-240-EUTB / SP-240-EURL |
| Date: | 11/13/17 - 11/14/17 | Part Number: | None |
| Test Engineer: | M.Gennaro | Serial Number: | None |
| Test: | Pulsed Current Injection | | |
| Test Specifications | | | |
| Test Spec: | MIL-STD-188-125-1 | | |

| Test Equipment | | | | | |
|----------------|-------------------------------------|----------------------------|----------------|----------------|-------------------|
| Asset No. | Description | Manufacturer | Model | Serial No. | Cal. Due |
| ED004 | Digital Oscilloscope | Tektronix | TDS784A | B040986 | 11/18/2017 |
| EJ046 | Current Monitor | Pearson | 2877 | none | 1/24/2018 |
| EJ052 | Current Monitor | Pearson Electronics | 110 | 88437 | 5/24/2018 |
| EF095 | Short Pulse Generator | Keystone | None | None | UWCE |
| EF096 | Intermediate Pulse Generator | Keystone | None | None | UWCE |
| EU000 | WaveStar (Version 2.9) | Tektronix | None | None | UWCE |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

UWCE: Used With Calibrated Equipment

| | |
|----------------|--|
| PAGE: 1 | ENGINEER/TECHNICIAN(S): M.Gennaro |
| OF: 1 | QUALITY REVIEWER: J. Sullivan |



EMI TEST REPORT FOR KAN-SEAL

3.1.2 PULSED CURRENT INJECTION TEST DATA

| Pulsed Current Injection Data Sheet | | | | | |
|-------------------------------------|---|--------|---------------|----------------|---------------------|
| EUT: | 1Ph Filter | | | Job Number: | 1708-152EA |
| M/N: | SP-120-240-W / SP-120-240-RL / SP-120-240-TB / SP-240-EUW / SP-240-EUTB / SP-240-EURL | P/N: | None | S/N: | None |
| Customer: | Kan-Seal | | | | |
| Date: | 11/13/17 - 11/14/17 | | | Test Engineer: | M.Gennaro |
| Config. #: | 1 | Power: | 120 / 240 VAC | Job Site: | Keystone Compliance |
| Test Specifications | | | | | |
| Test Spec.: | MIL-STD-188-125-1 | | | | |


| Intermediate Pulse Test Data | | | | | | | | | |
|------------------------------|--------------------|--------------------------|-------|------|---------------------|---------------------------|-------|------|--|
| Test Level (A) | Test Configuration | Pre-test Breakdown (VDC) | | | Induced Current (A) | Post-test Breakdown (VDC) | | | |
| | | L1-L2 | L1-PE | L2-N | | L1-L2 | L1-PE | L2-N | |
| 50 | L1-PE/N | 300 | 278 | 283 | ND | 300 | 281 | 285 | |
| 50 | L2-PE/N | | | | ND | | | | |
| 100 | L1-PE/N | 300 | 281 | 285 | 65 | 300 | 285 | 286 | |
| 100 | L2-PE/N | | | | 69 | | | | |
| 150 | L1-PE/N | 300 | 285 | 285 | 113 | 300 | 285 | 286 | |
| 150 | L2-PE/N | | | | 113 | | | | |
| 200 | L1-PE/N | 300 | 285 | 285 | 156 | 300 | 286 | 283 | |
| 200 | L2-PE/N | | | | 156 | | | | |
| 250 | L1-PE/N | 300 | 286 | 286 | 202 | 300 | 286 | 290 | |
| 250 | L2-PE/N | | | | 206 | | | | |

| Short Pulse Test Data | | | | | | | | | |
|-----------------------|--------------------|--------------------------|-------|------|---------------------|---------------------------|-------|------|--|
| Test Level (A) | Test Configuration | Pre-test Breakdown (VDC) | | | Induced Current (A) | Post-test Breakdown (VDC) | | | |
| | | L1-L2 | L1-PE | L2-N | | L1-L2 | L1-PE | L2-N | |
| 500 | L1-PE/N | 295 | 285 | 281 | 500 | 297 | 286 | 281 | |
| 500 | L2-PE/N | | | | 472 | | | | |
| 1000 | L1-PE/N | 297 | 286 | 281 | 1000 | 297 | 286 | 283 | |
| 1000 | L2-PE/N | | | | 1000 | | | | |
| 1500 | L1-PE/N | 297 | 286 | 283 | 1350 | 297 | 286 | 283 | |
| 1500 | L2-PE/N | | | | 1350 | | | | |
| 2000 | L1-PE/N | 297 | 286 | 283 | 1670 | 297 | 286 | 283 | |
| 2000 | L2-PE/N | | | | 1670 | | | | |
| 2500 | L1-PE/N | 297 | 286 | 283 | 1950 | 297 | 286 | 281 | |
| 2500 | L2-PE/N | | | | 1950 | | | | |

| |
|---|
| EUT Operating Modes |
| Unpowered |
| Comments |
| No Damage Or Degradation Of EUT Performance |
| Deviations From Test Standard |
| N/A |
| Results |
| Compliant |


EMI TEST REPORT FOR KAN-SEAL

Intermediate Pulse Current Amplitude Calibration

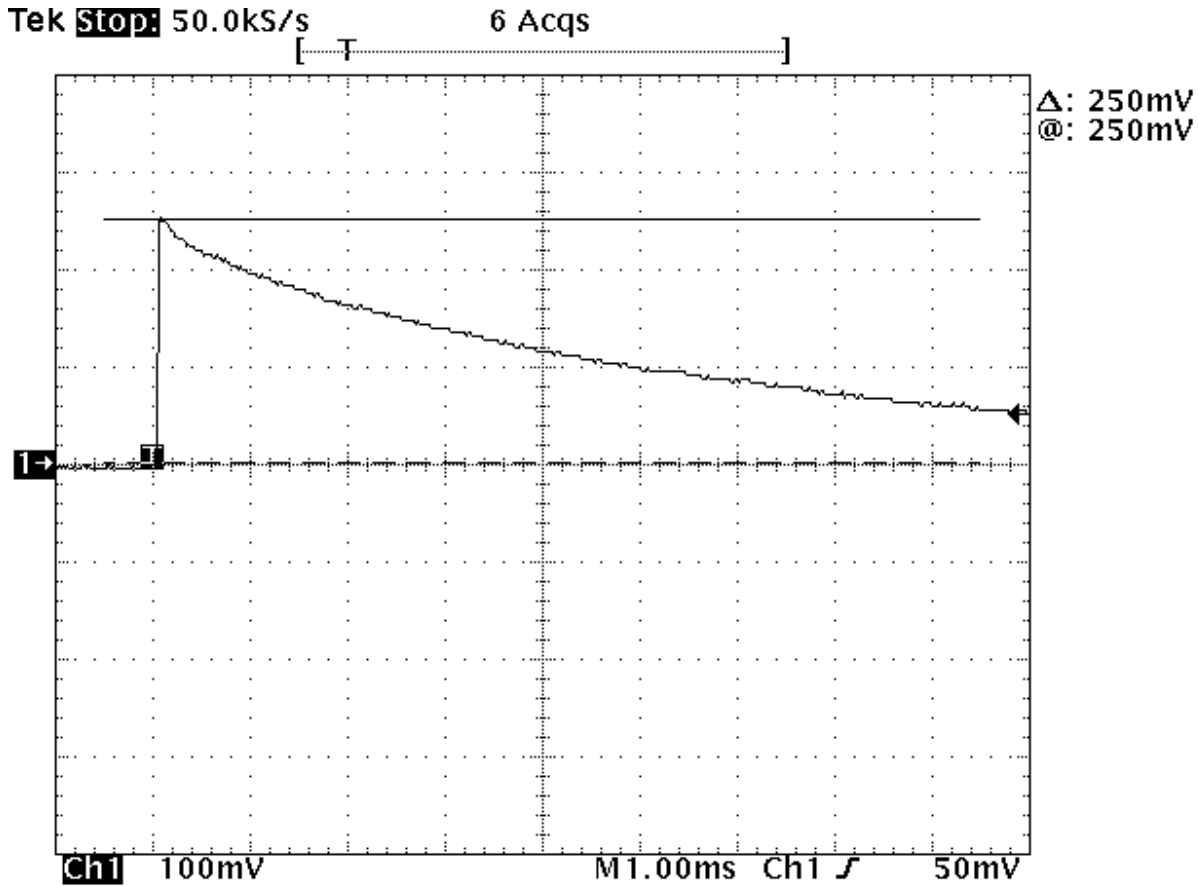


EMI TEST REPORT FOR KAN-SEAL

Intermediate Pulse Current Fall Time Calibration

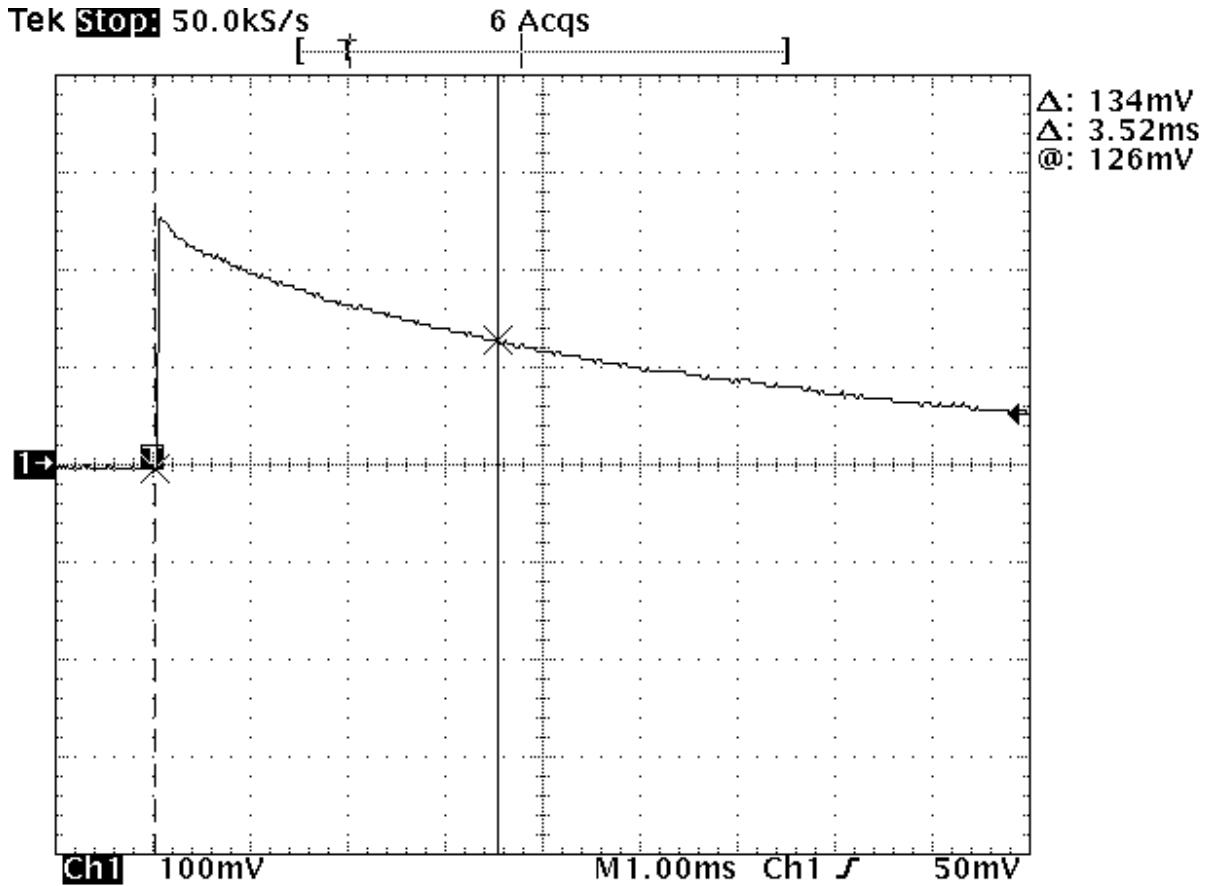


EMI TEST REPORT FOR KAN-SEAL

Intermediate Pulse Current Rise Time Calibration

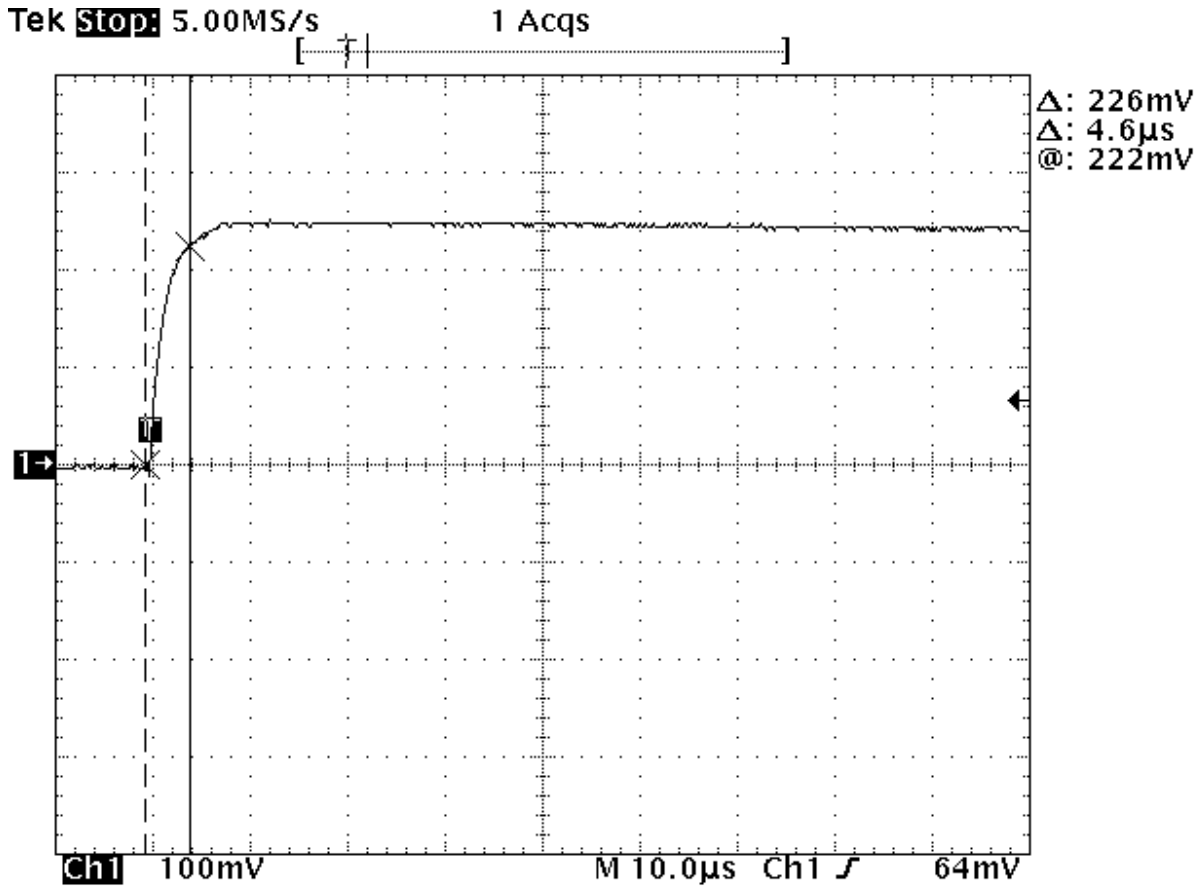

EMI TEST REPORT FOR KAN-SEAL

Short Pulse Current Amplitude Calibration

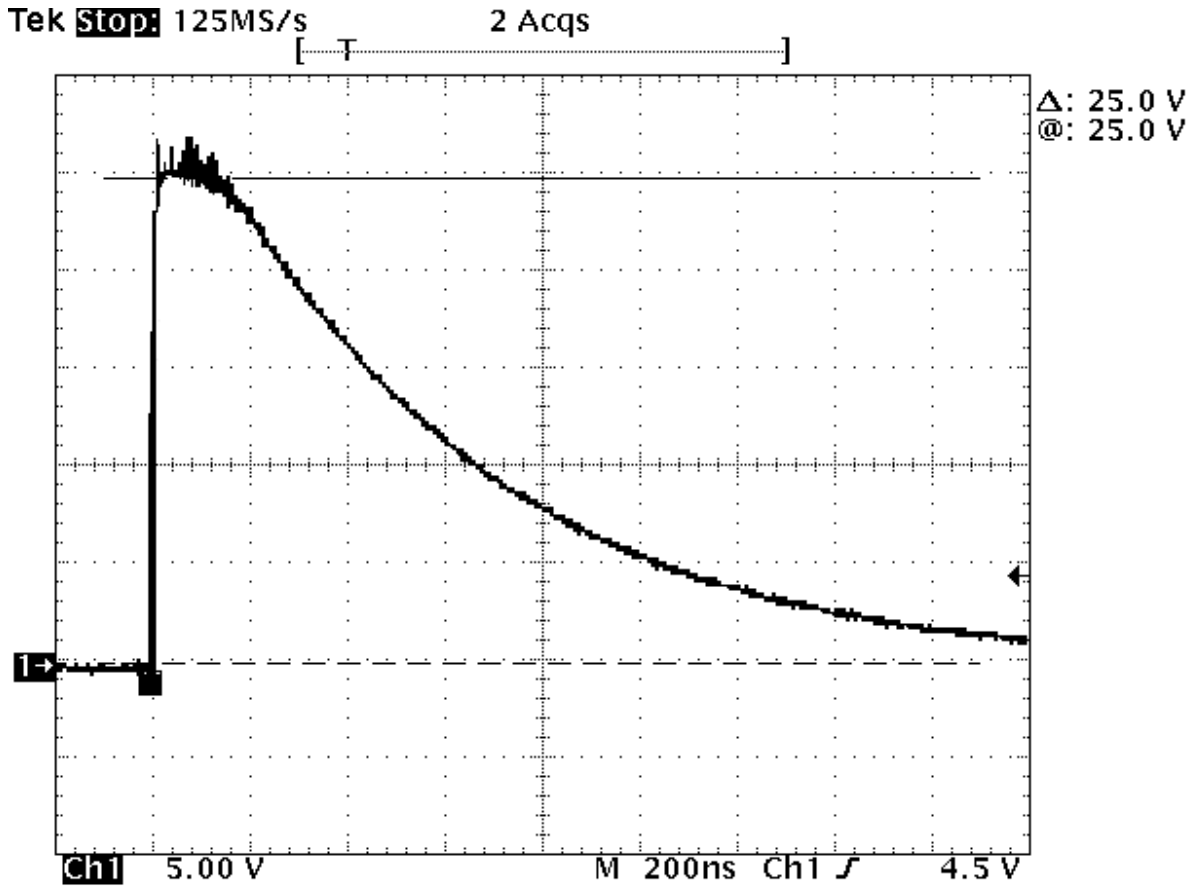


EMI TEST REPORT FOR KAN-SEAL

Short Pulse Current Fall Time Calibration

Tek Stop: 125MS/s


2 Acqs

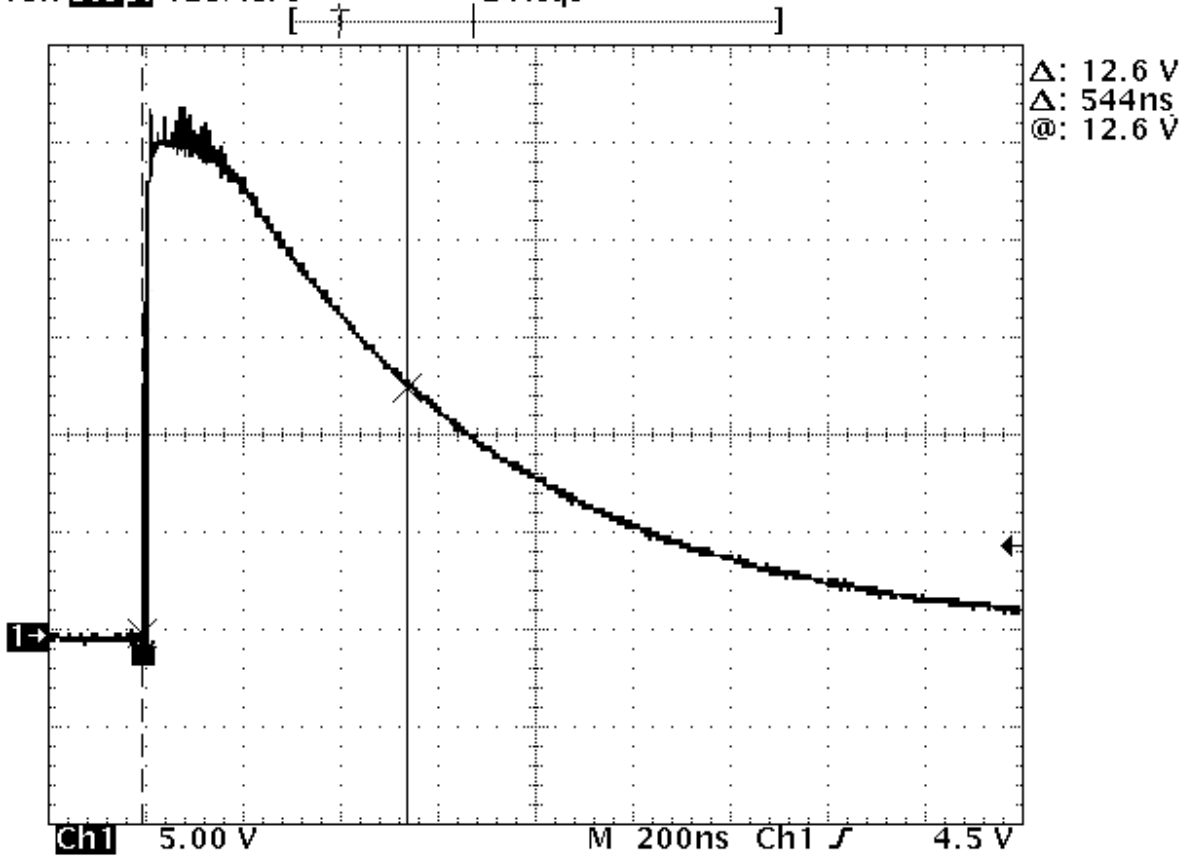

EMI TEST REPORT FOR KAN-SEAL

Short Pulse Current Rise Time Calibration

Tek Stop: 4.00GS/s 5 Acqs

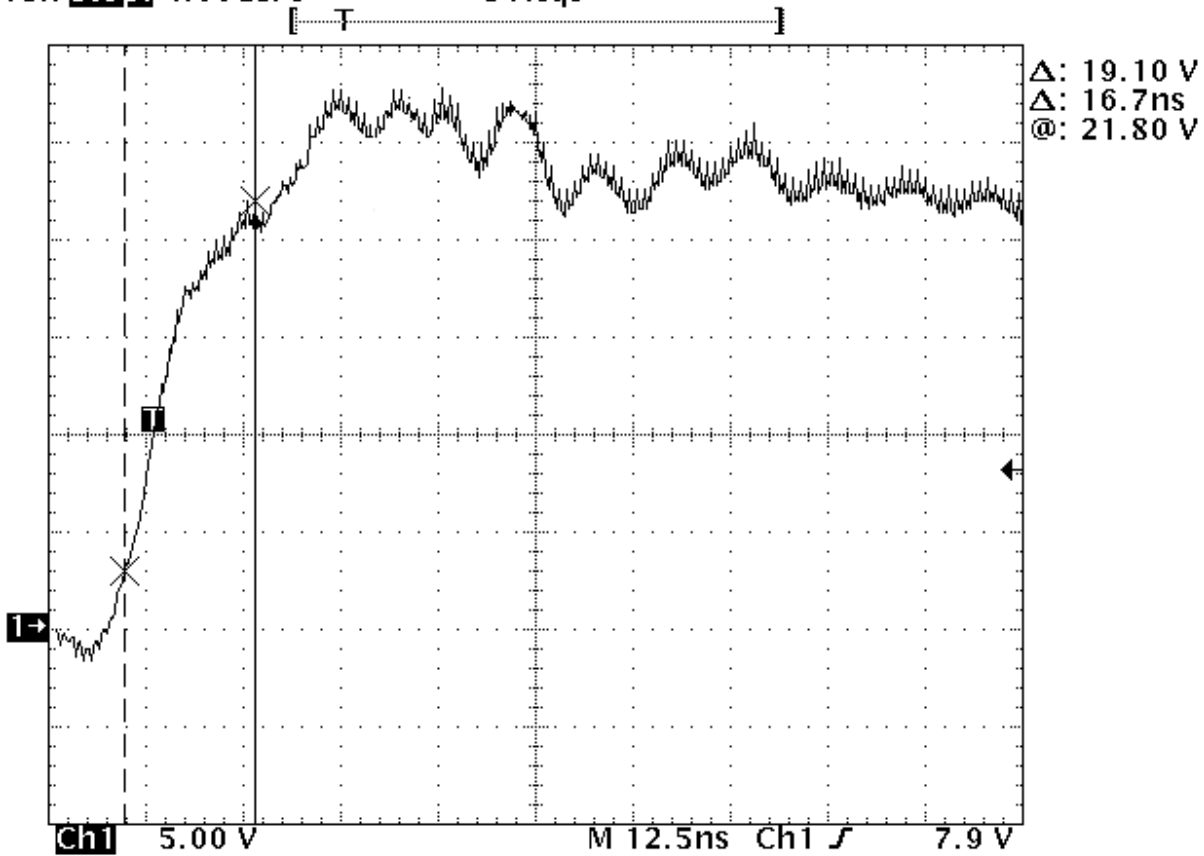


EMI TEST REPORT FOR KAN-SEAL

Line 1 40% Intermediate Test Plot

Tek Stop: 100kS/s

1 Acqs

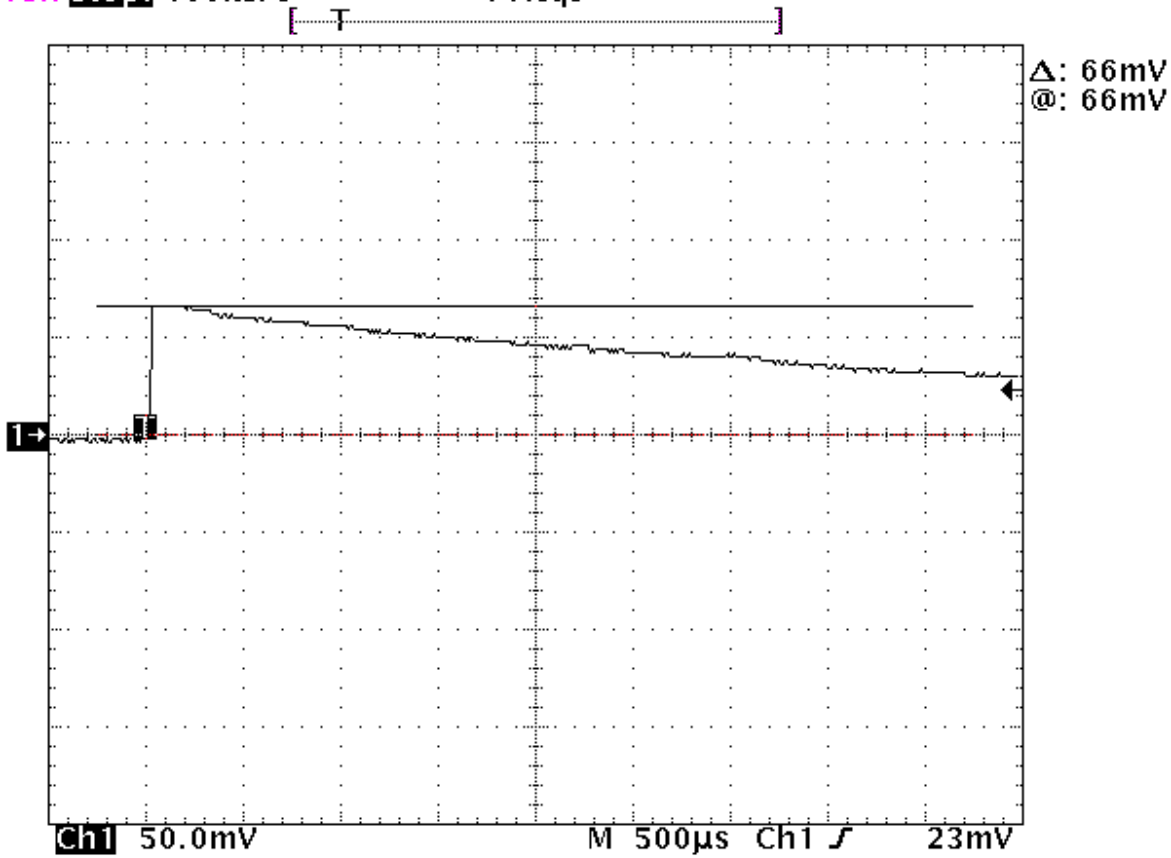


EMI TEST REPORT FOR KAN-SEAL

Line 2 40% Intermediate Test Plot

Tek Stop: 100kS/s

2 Acqs

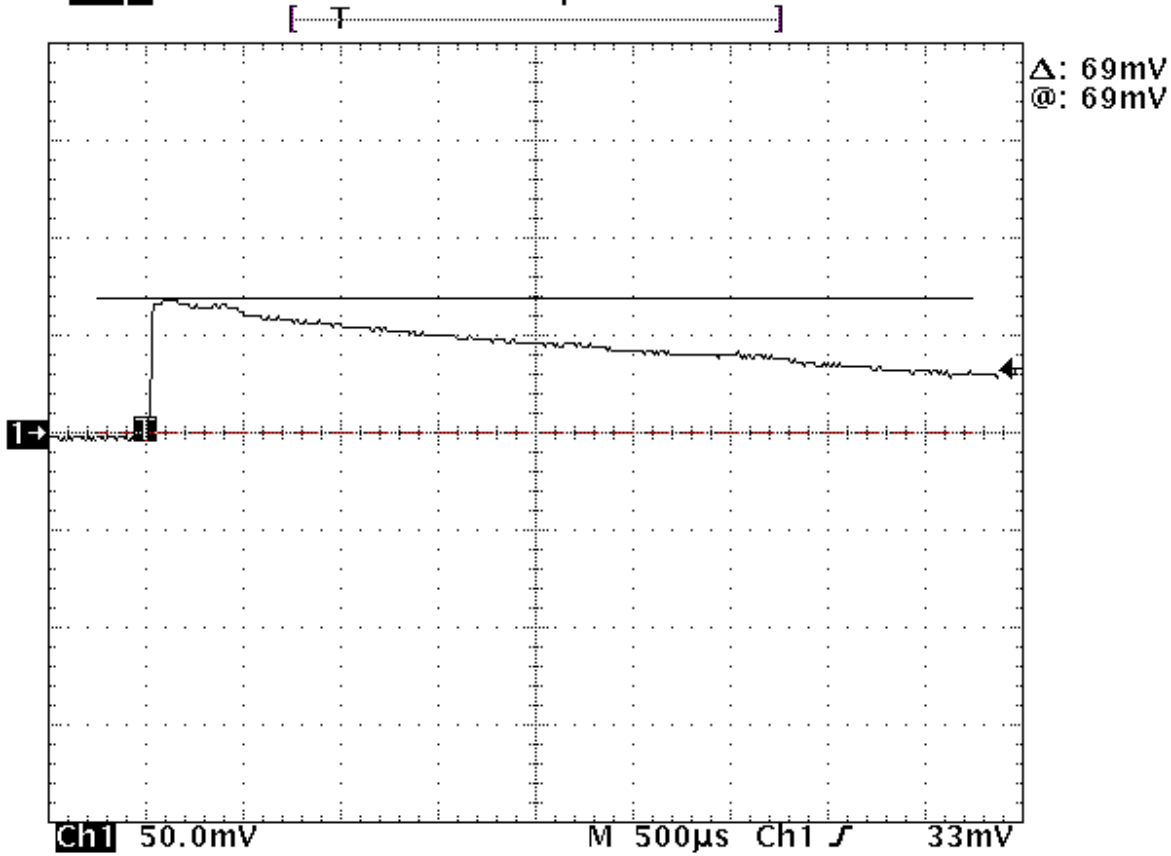


EMI TEST REPORT FOR KAN-SEAL

Line 1 60% Intermediate Test Plot

Tek Stop: 100kS/s

2 Acqs

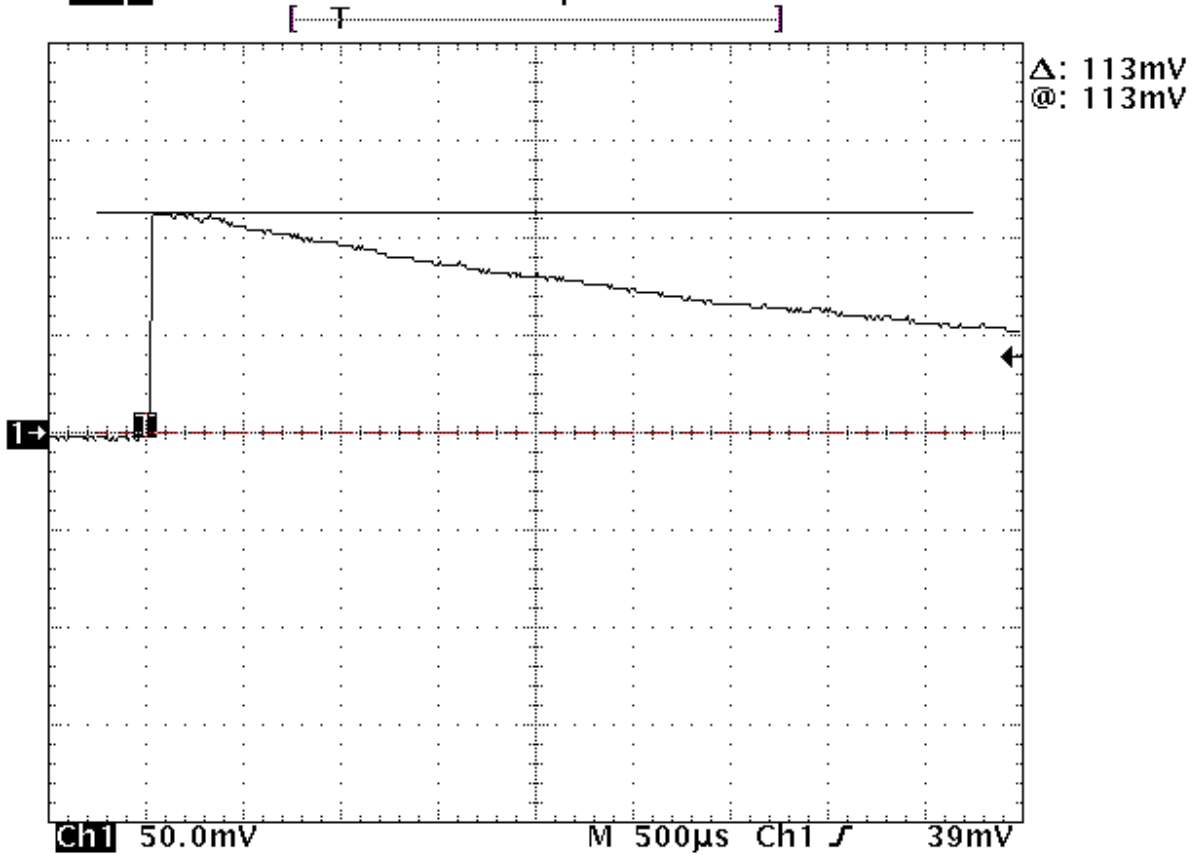


EMI TEST REPORT FOR KAN-SEAL

Line 2 60% Intermediate Test Plot

Tek Stop: 100kS/s

2 Acqs

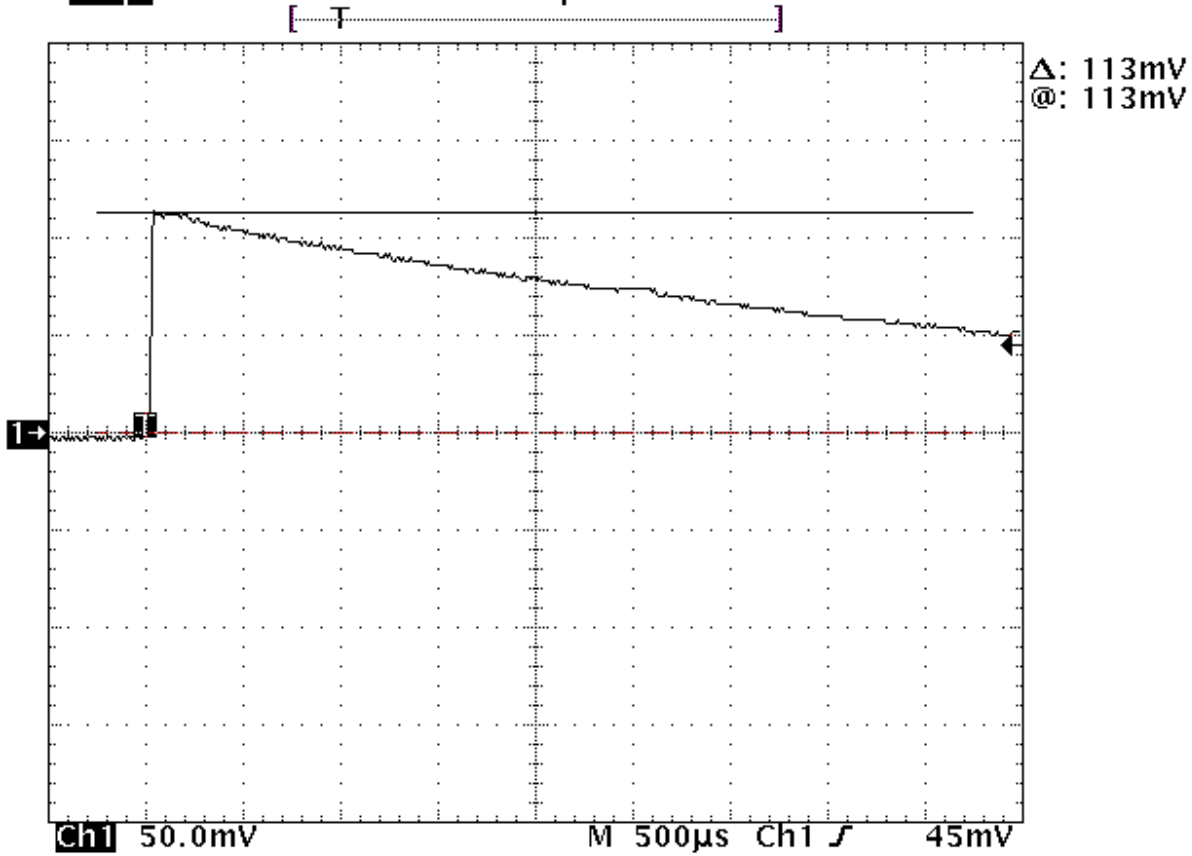


EMI TEST REPORT FOR KAN-SEAL

Line 1 80% Intermediate Test Plot

Tek Stop: 100kS/s

2 Acqs

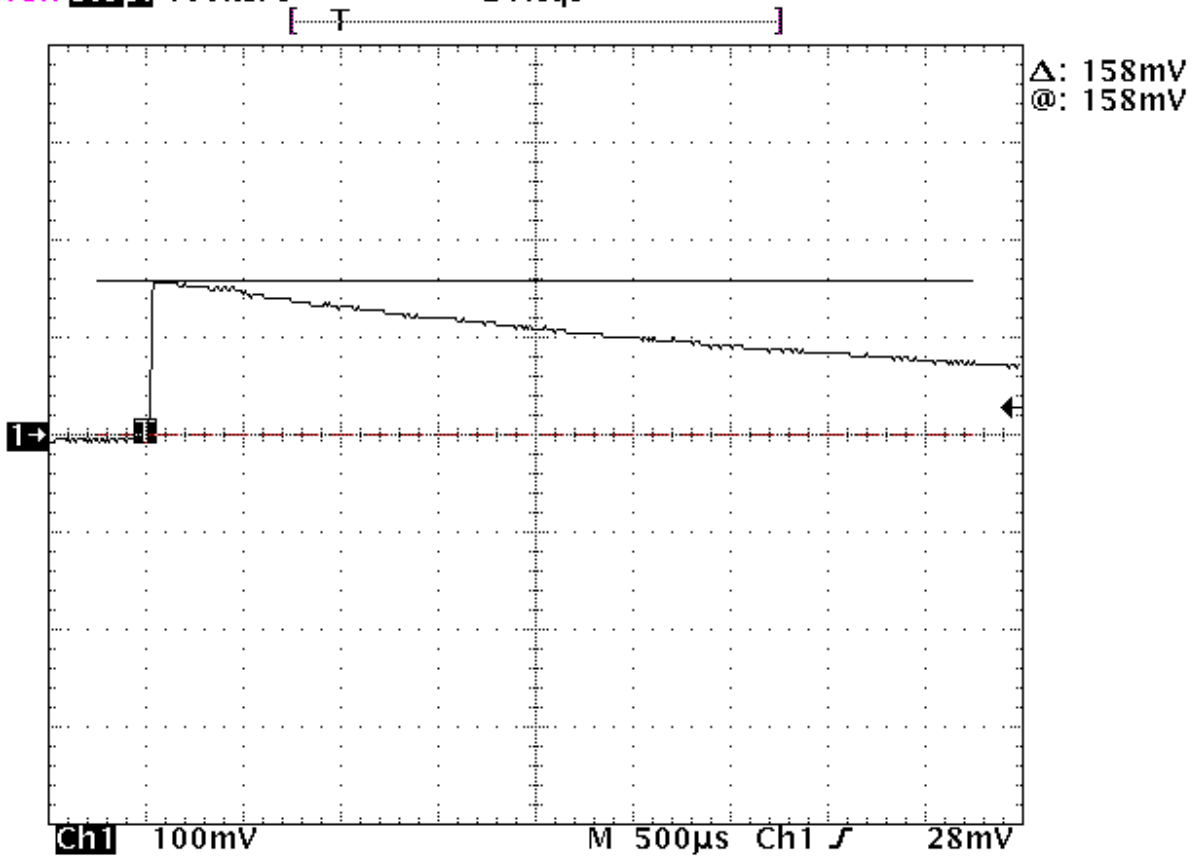


EMI TEST REPORT FOR KAN-SEAL

Line 2 80% Intermediate Test Plot

Tek Stop: 100kS/s


2 Acqs

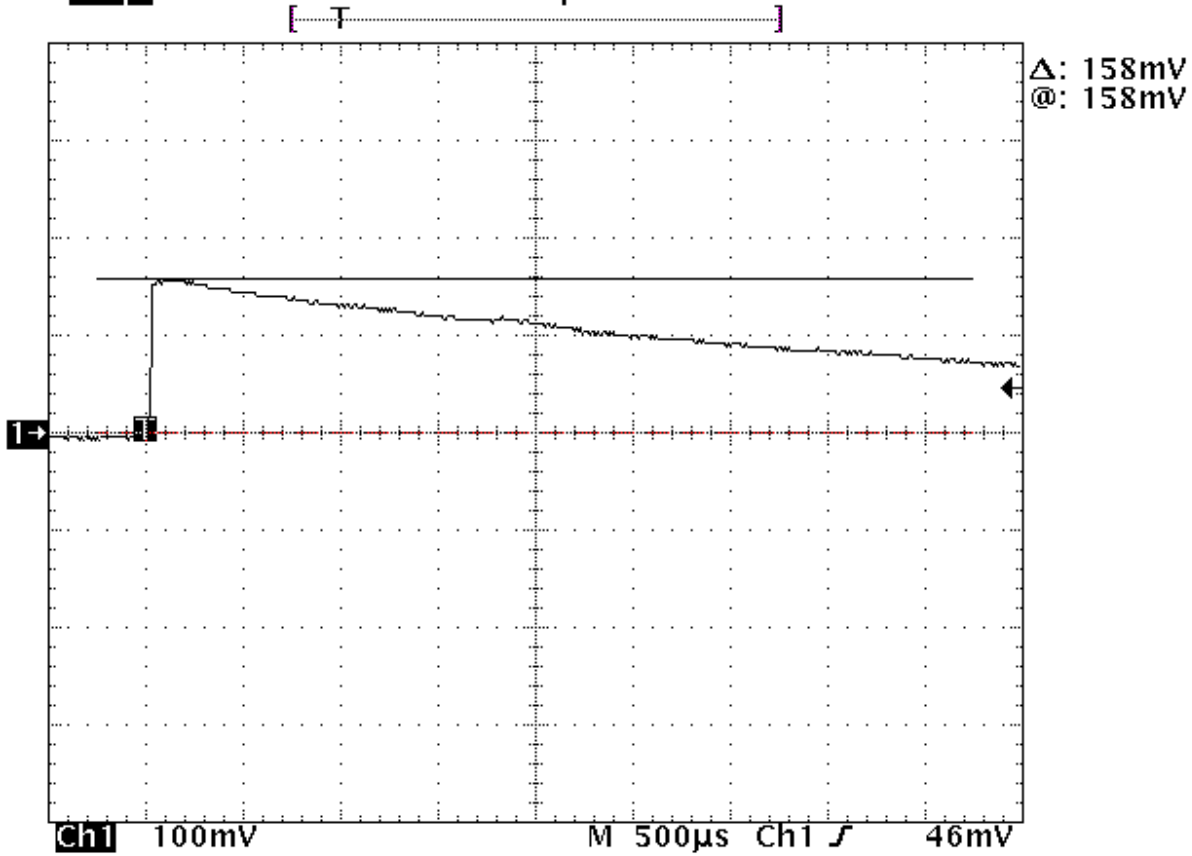

EMI TEST REPORT FOR KAN-SEAL

Line 1 100% Intermediate Test Plot

Tek Stop: 100kS/s 2 Acqs

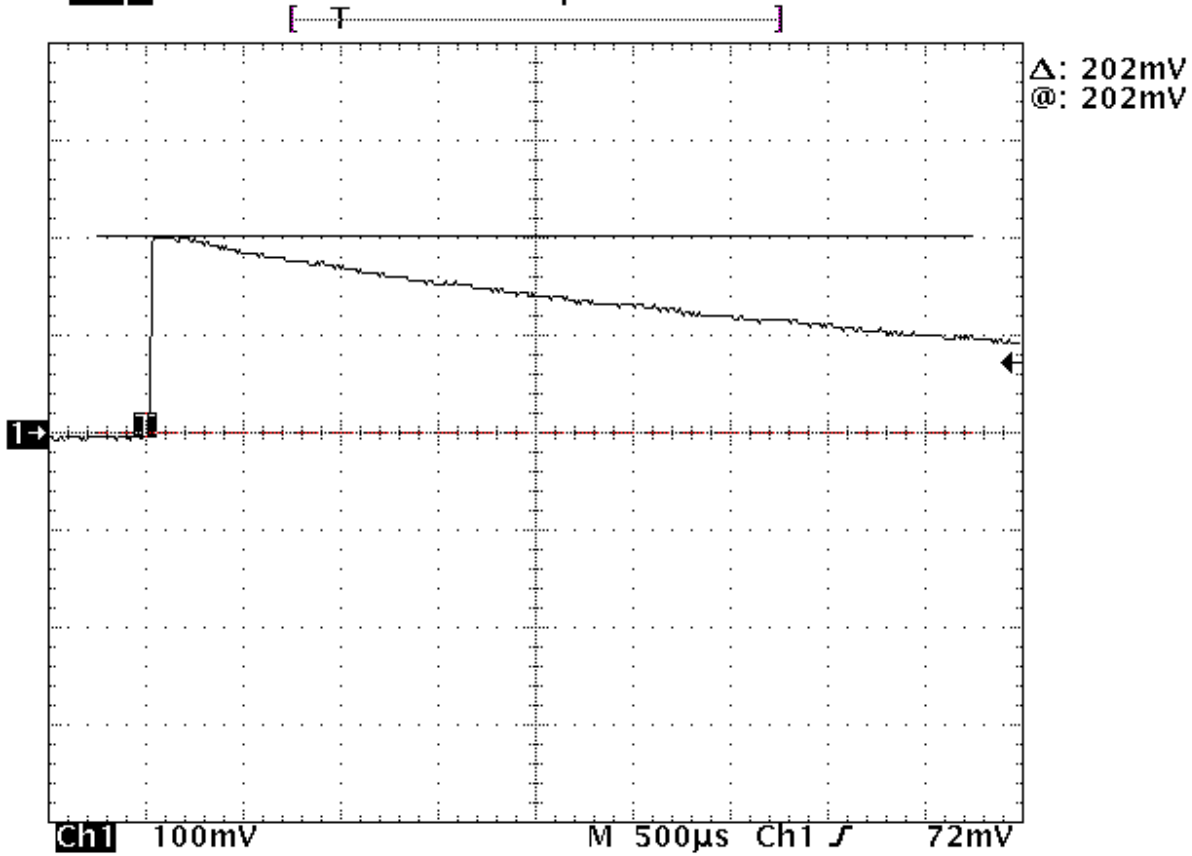


EMI TEST REPORT FOR KAN-SEAL

Line 2 100% Intermediate Test Plot

Tek Stop: 100kS/s

2 Acqs

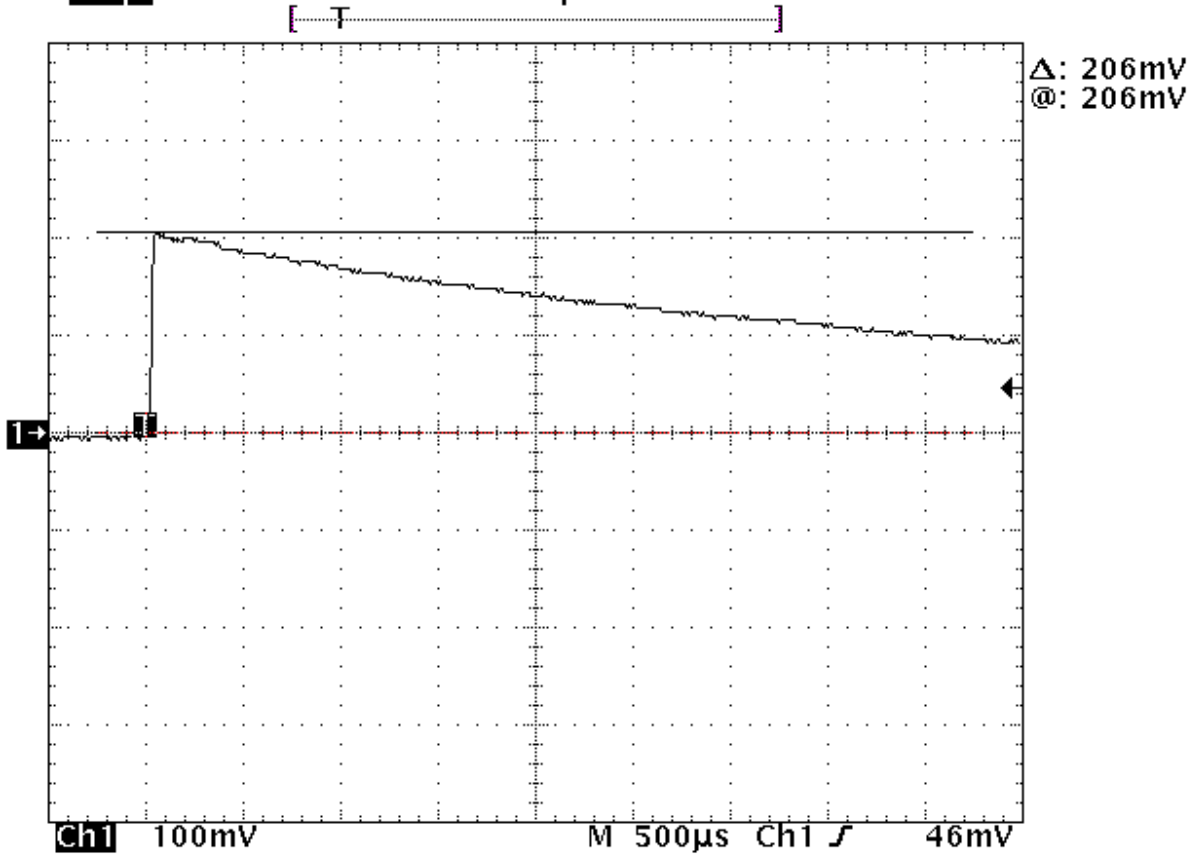


EMI TEST REPORT FOR KAN-SEAL

Line 1 20% Short Test Plot

Tek Stop: 125MS/s

2 Acqs

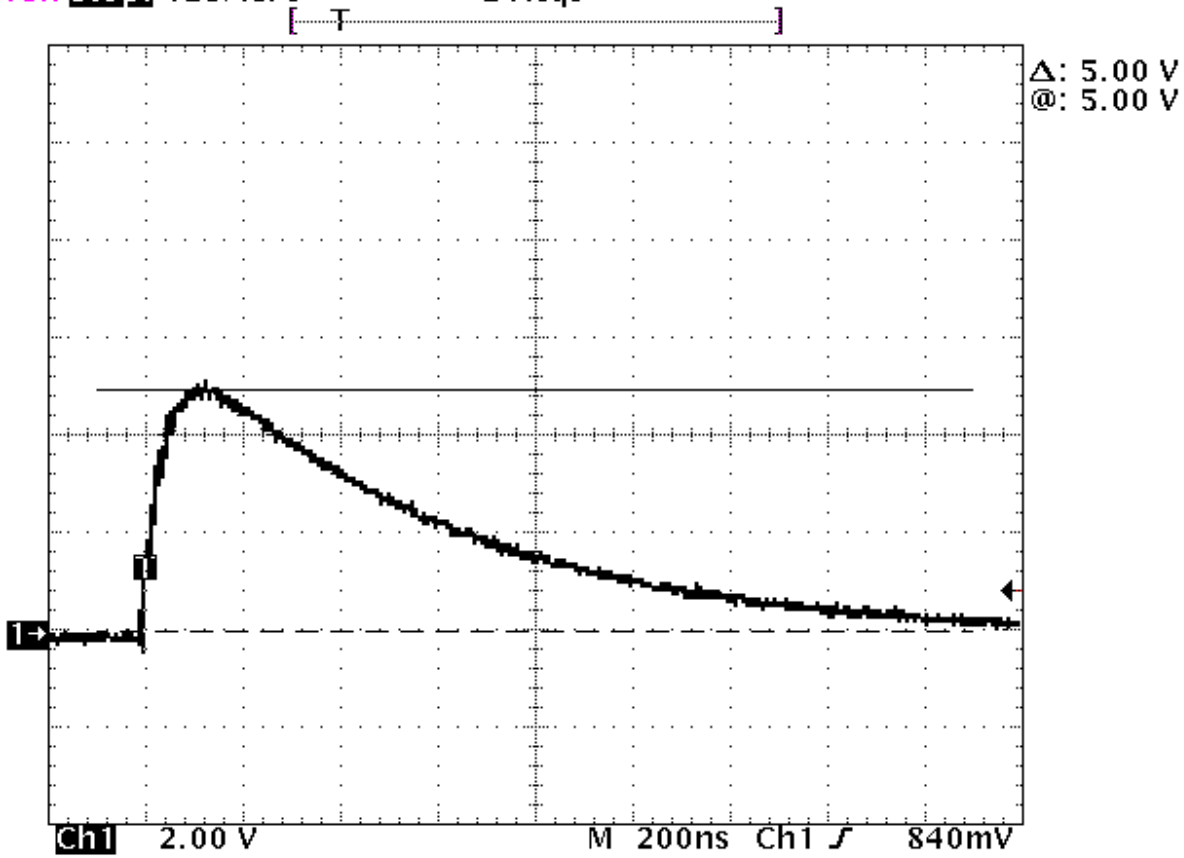


EMI TEST REPORT FOR KAN-SEAL

Line 2 20% Short Test Plot

Tek Stop: 125MS/s

2 Acqs

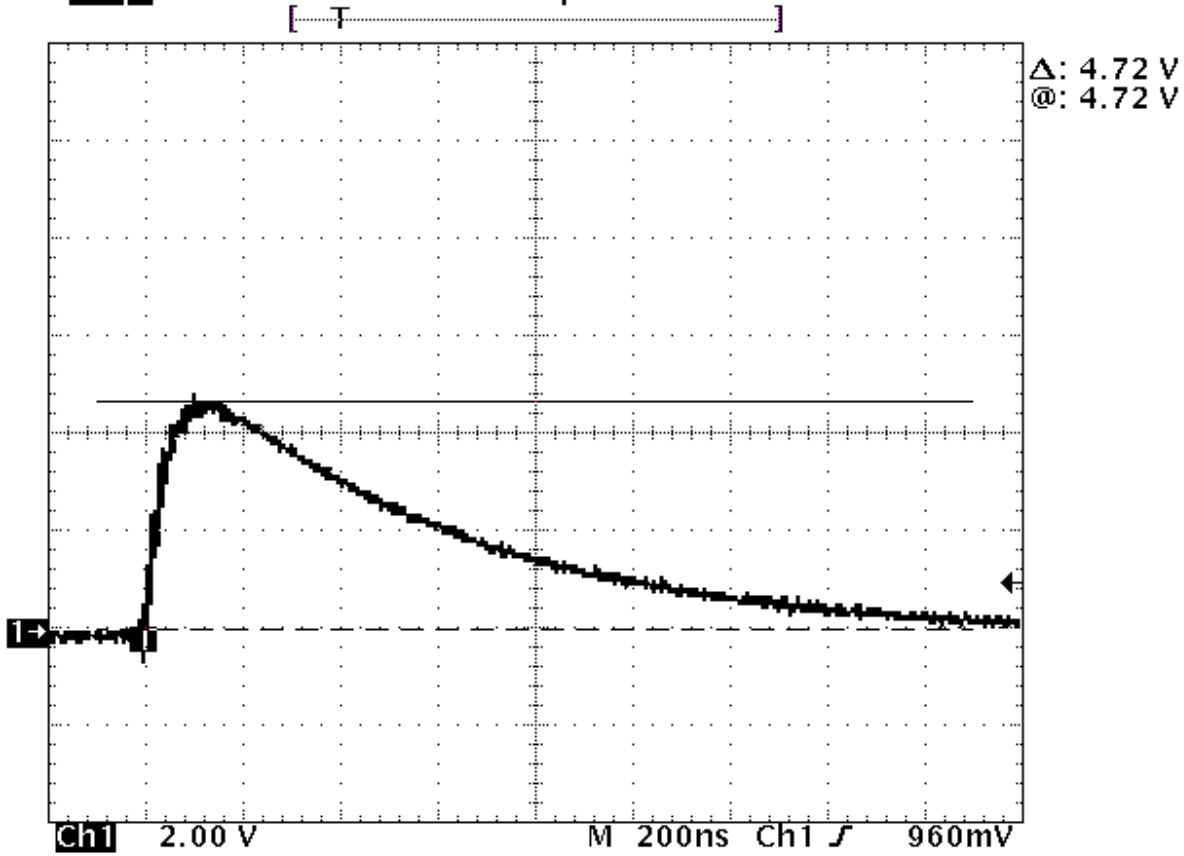


EMI TEST REPORT FOR KAN-SEAL

Line 1 40% Short Test Plot

Tek Stop: 125MS/s

2 Acqs

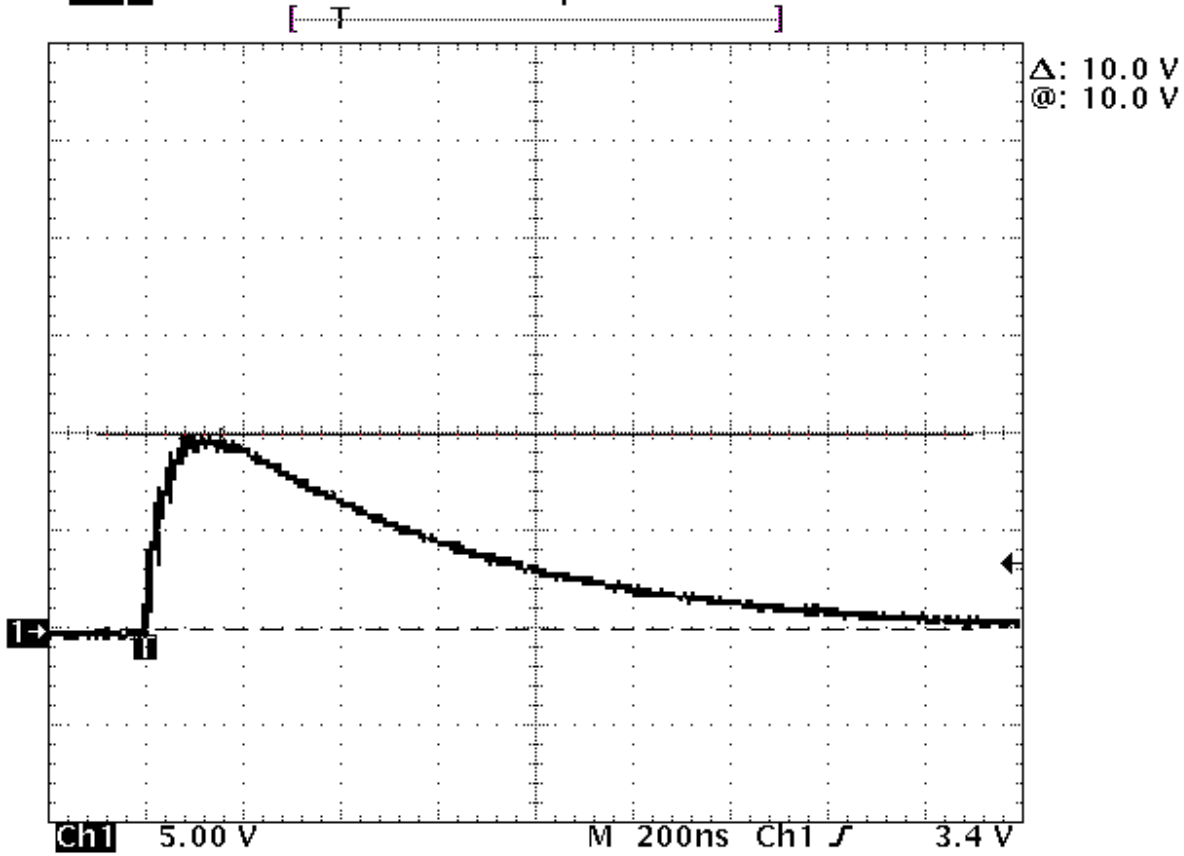


EMI TEST REPORT FOR KAN-SEAL

Line 2 40% Short Test Plot

Tek Stop: 125MS/s

2 Acqs

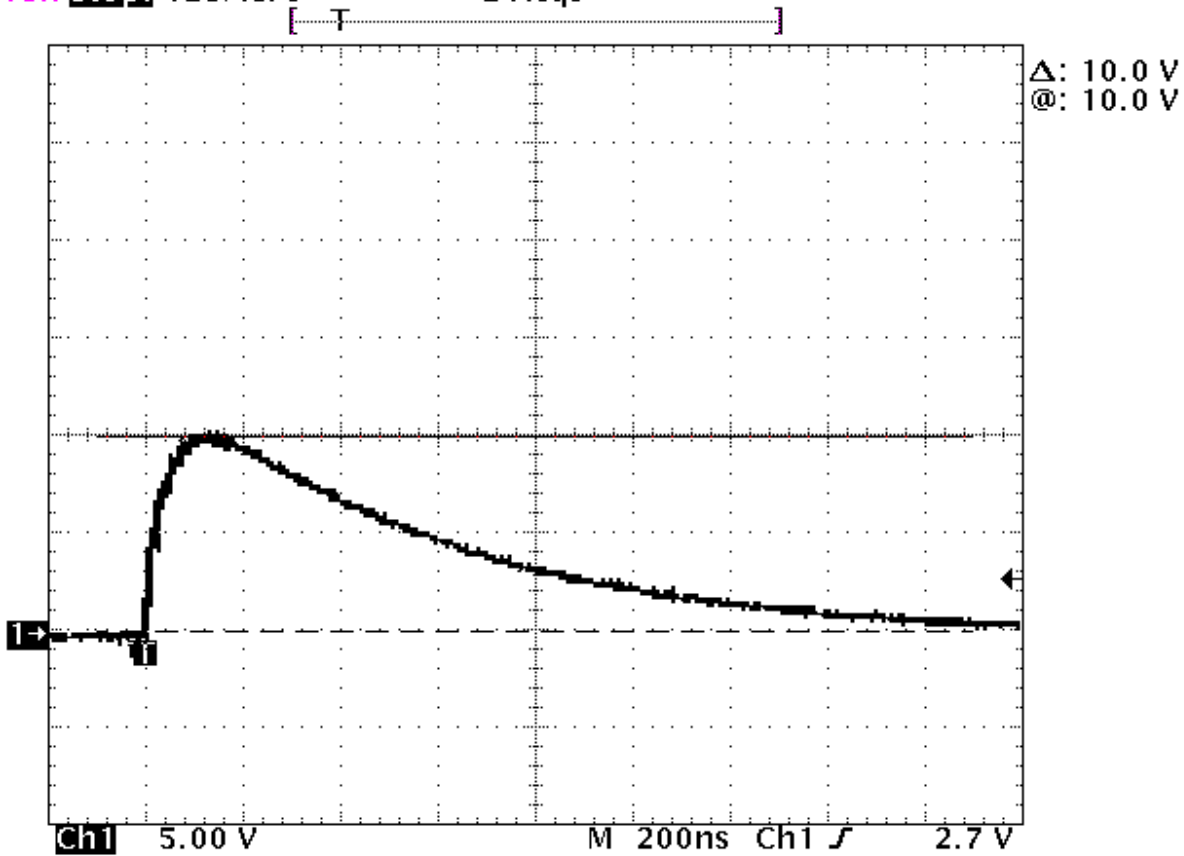


EMI TEST REPORT FOR KAN-SEAL

Line 1 60% Short Test Plot

Tek Stop: 125MS/s

5 Acqs

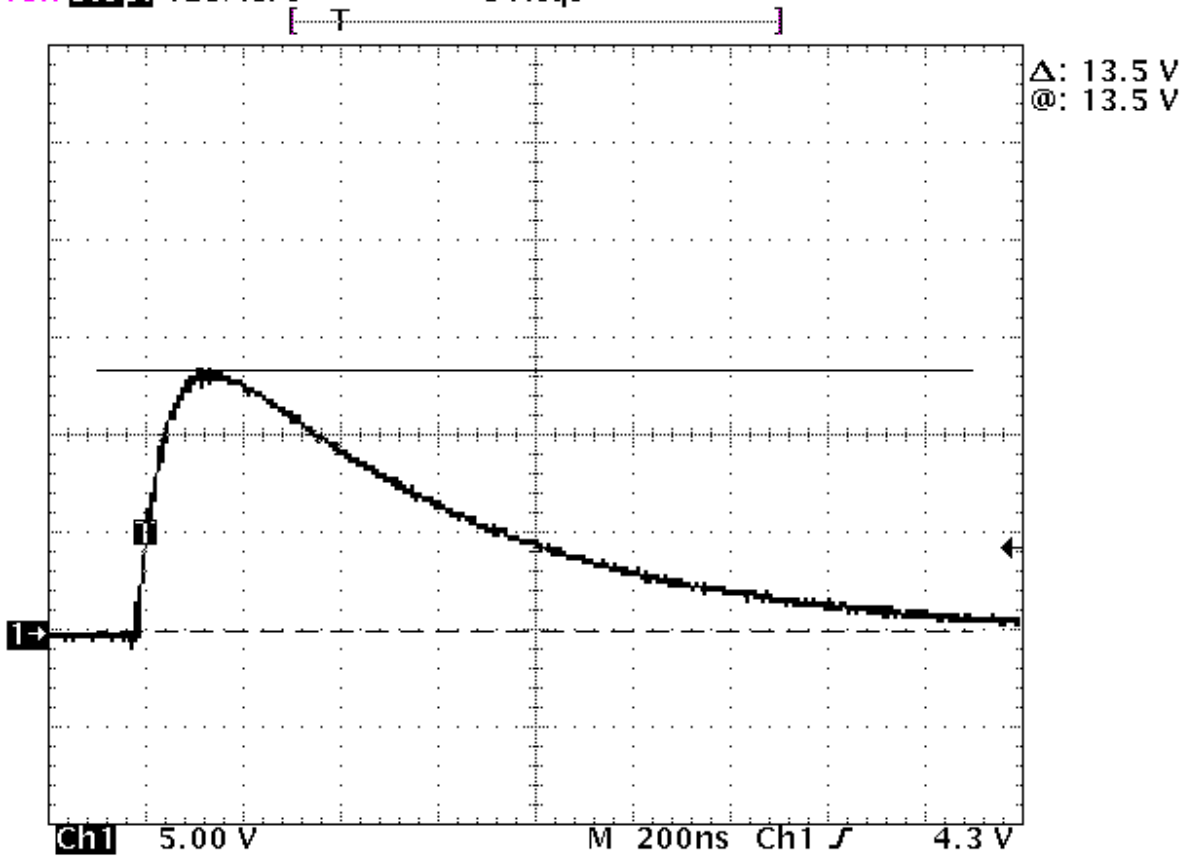


EMI TEST REPORT FOR KAN-SEAL

Line 2 60% Short Test Plot

Tek Stop: 125MS/s

2 Acqs

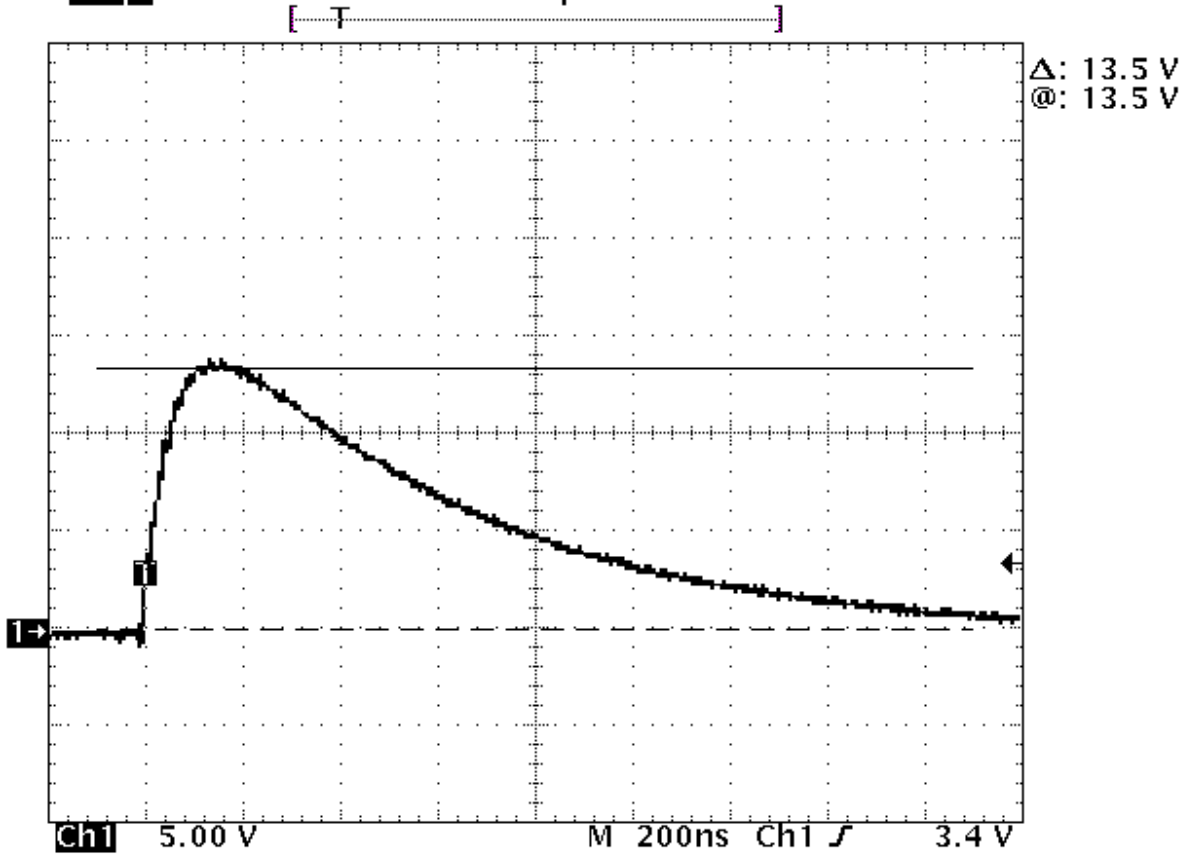


EMI TEST REPORT FOR KAN-SEAL

Line 1 80% Short Test Plot

Tek Stop: 125MS/s

4 Acqs

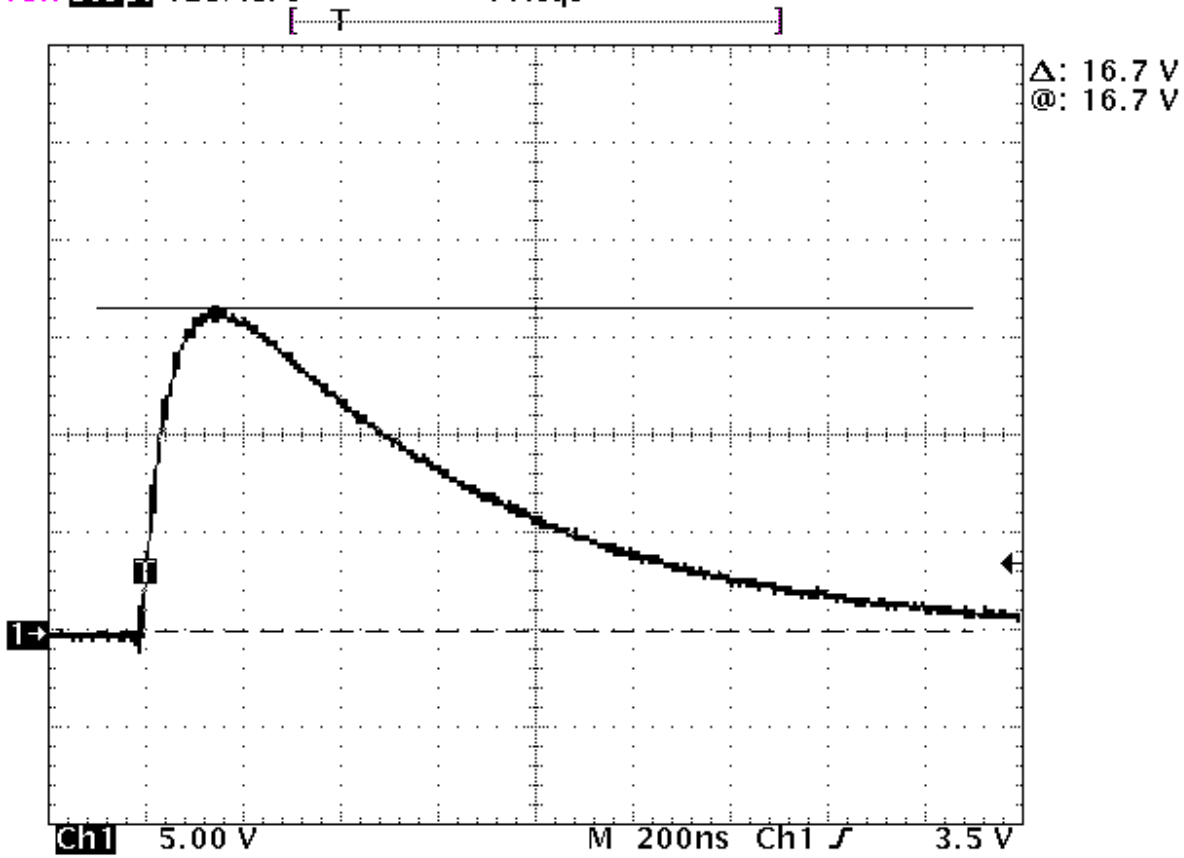


EMI TEST REPORT FOR KAN-SEAL

Line 2 80% Short Test Plot

Tek Stop: 125MS/s

2 Acqs

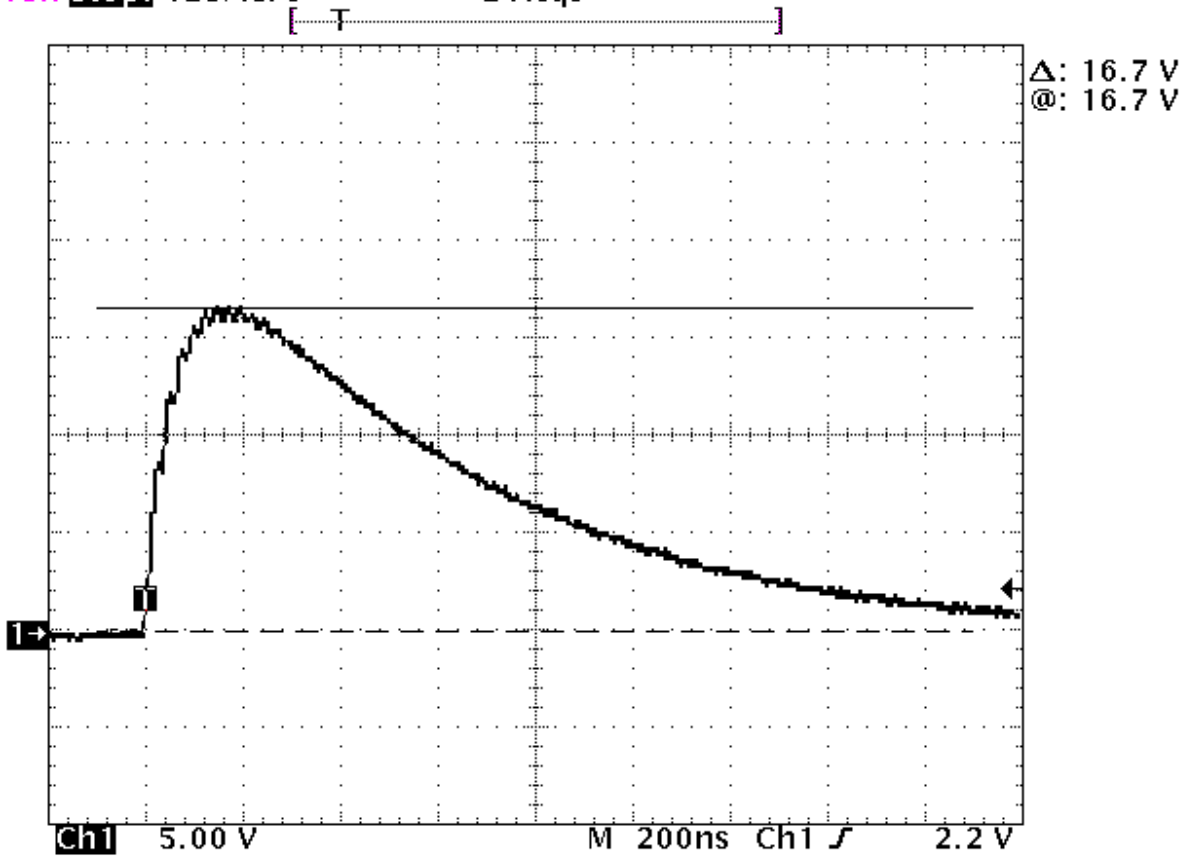


EMI TEST REPORT FOR KAN-SEAL

Line 1 100% Short Test Plot

Tek Stop: 125MS/s

2 Acqs

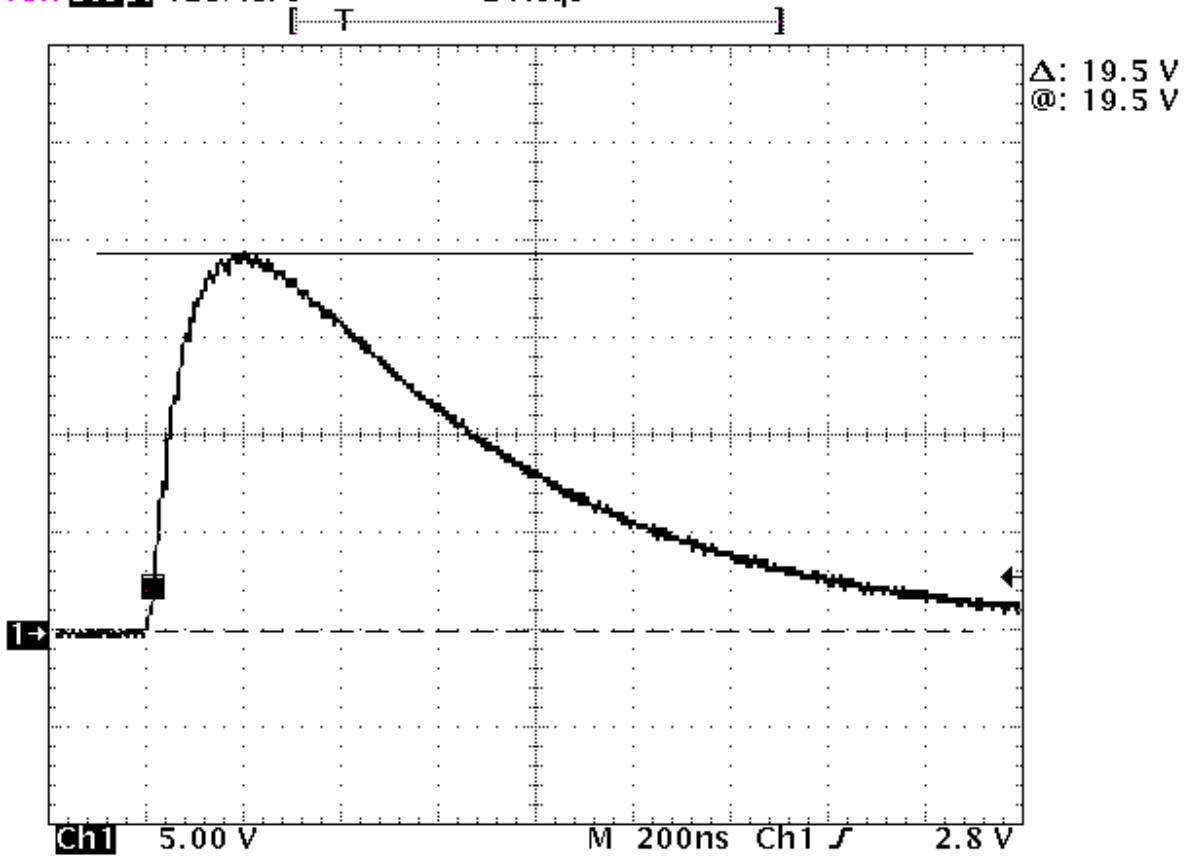


EMI TEST REPORT FOR KAN-SEAL

Line 2 100% Short Test Plot

Tek Stop: 125MS/s

2 Acqs

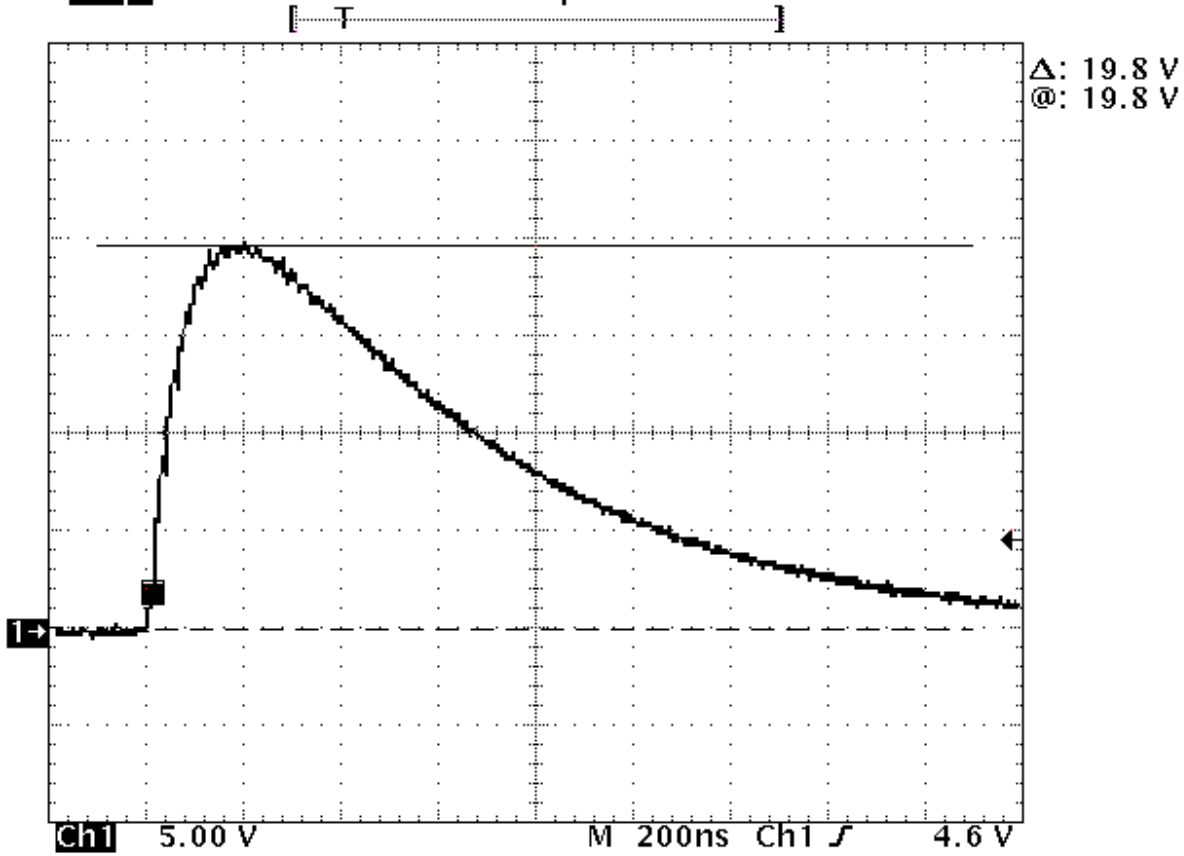

EMI TEST REPORT FOR KAN-SEAL

3.1.3 PULSED CURRENT INJECTION TEST PHOTOGRAPHS


| Pulsed Current Injection | |
|--------------------------------------|--|
| MIL-STD-188-125-1 | |
| Intermediate Pulse Test Setup | |
| Unit Tested | 1Ph Filter |
| Model Number | SP-120-240-W / SP-120-240-RL / SP-120-240-TB / SP-240-EUW / SP-240-EUTB / SP-240-EURL |
| Part Number | None |
| Serial Number | None |
| Kan-Seal | |
| Date: | 11/13/17 - 11/14/17 |
| Job #: | 1708-152EA |

REPORT NO.: 1708-152EA
REVISION: A

EMI TEST REPORT FOR KAN-SEAL



| | |
|---------------------------------|--|
| Pulsed Current Injection | |
| MIL-STD-188-125-1 | |
| Short Pulse Test Setup | |
| Unit Tested | 1Ph Filter |
| Model Number | SP-120-240-W / SP-120-240-RL / SP-120-240-TB / SP-240-EUW / SP-240-EUTB / SP-240-EURL |
| Part Number | None |
| Serial Number | None |
| Kan-Seal | |
| Date: | 11/13/17 - 11/14/17 |
| Job #: | 1708-152EA |

EMI TEST REPORT FOR KAN-SEAL

SECTION 4 – CONCLUSION

- a) The 1Ph Filter, Model Number: SP-120-240-W / SP-120-240-RL / SP-120-240-TB / SP-240-EUW / SP-240-EUTB / SP-240-EURL; Part Number: None; Serial Number: None, was subjected to the following EMC Tests in accordance with MIL-STD-188-125-1 and the specifications as shown in Table 2:

TABLE 2 TEST PERFORMED & RESULTS

| Test Description | Specification | Results |
|---------------------------------|--------------------------|------------------|
| MIL-STD-188-125-1 | | |
| Pulsed Current Injection | MIL-STD-188-125-1 | Compliant |

- b) The 1Ph Filter was returned to Kan-Seal after completion of the EMI Test.